

TOPIC: 291005  
KNOWLEDGE: K1.01 [2.6/2.6]  
QID: B229

If a locked rotor occurs on an operating motor-driven pump, motor amps will...

- A. decrease due to the decreased pump flow.
- B. decrease due to the decreased rotor speed.
- C. increase due to the decreased pump flow.
- D. increase due to the decreased rotor speed.

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.01 [2.6/2.6]  
QID: B1026

A motor-driven centrifugal pump exhibited indications of pump failure while being started. Which one of the following pairs of observations indicate that the pump failure is a sheared impeller shaft?

- A. Excessive duration of high starting current and motor breaker trips
- B. Excessive duration of high starting current and no change in system flow rate
- C. Lower than normal running current and motor breaker trips
- D. Lower than normal running current and no change in system flow rate

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.01 [2.6/2.6]  
QID: B1326 (P2127)

A cooling water pump is being driven by an ac induction motor. Which one of the following describes how and why pump motor current will change if the pump shaft seizes?

- A. Decreases due to decreased pump flow
- B. Decreases due to increased counter electromotive force
- C. Increases due to decreased pump flow
- D. Increases due to decreased counter electromotive force

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.01 [2.6/2.6]  
QID: B1726

A cooling water pump is being driven by an ac induction motor. Which one of the following describes how and why pump motor current will change if the pump shaft shears?

- A. Decreases due to decreased pump work
- B. Decreases due to decreased counter electromotive force
- C. Increases due to increased pump work
- D. Increases due to decreased counter electromotive force

ANSWER: A.

TOPIC: 291005  
KNOWLEDGE: K1.01 [2.6/2.6]  
QID: B2626 (P1427)

A typical motor-driven cooling water pump is operating normally when it experiences a locked rotor. How will pump ammeter indication respond?

- A. Decreases immediately to zero due to breaker trip
- B. Decreases immediately to no-load motor amps
- C. Increases immediately to many times running current, then decreases to no-load motor amps
- D. Increases immediately to many times running current, then decreases to zero upon breaker trip

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.01 [2.6/2.6]  
QID: B2826 (P3127)

A motor-driven centrifugal pump exhibits indications of pump failure while being started in an idle cooling water system. Assuming the pump motor breaker does not trip, which one of the following pairs of indications would be observed if the pump failure is a locked impeller shaft?

- A. Lower than normal running current with zero system flow rate
- B. Lower than normal running current with a fraction of normal system flow rate
- C. Excessive duration of starting current peak with zero system flow rate
- D. Excessive duration of starting current peak with a fraction of normal system flow rate

ANSWER: C.

TOPIC: 291005  
KNOWLEDGE: K1.02 [2.6/2.7]  
QID: B1126 (P1528)

Continuous operation of a motor at rated load with a loss of required cooling to the motor windings will eventually result in...

- A. cavitation of the pumped fluid.
- B. failure of the motor overcurrent protection devices.
- C. breakdown of the motor insulation and electrical grounds.
- D. phase current imbalance in the motor and overspeed trip actuation.

ANSWER: C.

TOPIC: 291005  
KNOWLEDGE: K1.02 [2.6/2.7]  
QID: B1526 (P1028)

Which one of the following will result from prolonged operation of an ac motor with excessively high stator temperatures?

- A. Decreased electrical current demand due to reduced counter electromotive force
- B. Increased electrical current demand due to reduced counter electromotive force
- C. Decreased electrical resistance to ground due to breakdown of winding insulation
- D. Increased electrical resistance to ground due to breakdown of winding insulation

ANSWER: C.

TOPIC: 291005  
KNOWLEDGE: K1.02 [2.6/2.7]  
QID: B1927 (P528)

Which one of the following will provide motor protection against electrical damage caused by gradual bearing degradation?

- A. Thermal overload device
- B. Overcurrent trip relay
- C. Underfrequency relay
- D. Undervoltage device

ANSWER: A.

TOPIC: 291005  
KNOWLEDGE: K1.03 [2.6/2.7]  
QID: B2228 (P1128)

If the voltage supplied by an ac generator to an isolated electrical system with a power factor of 1.0 is held constant while real load (kW) is increased, the current supplied by the generator will increase in direct proportion to the \_\_\_\_\_ of the change in real load. (Assume power factor remains constant at 1.0.)

- A. square root
- B. amount
- C. square
- D. cube

ANSWER: B.

TOPIC: 291005  
KNOWLEDGE: K1.03 [2.6/2.7]  
QID: B2327

A main generator that is connected to an infinite power grid has the following generator indications:

100 MWe  
0 MVAR  
2,900 amps  
20,000 volts

If MVAR does not change while real load is increased to 200 MWe, the current supplied by the generator will increase to approximately...

- A. 11,600 amps
- B. 8,200 amps
- C. 5,800 amps
- D. 4,100 amps

ANSWER: C.

TOPIC: 291005  
KNOWLEDGE: K1.03 [2.6/2.7]  
QID: B3227 (P3229)

A cooling water system is being returned to service following maintenance on the two identical centrifugal cooling water pumps. The two pumps take suction from a common suction header and discharge to a common discharge header. Each pump is driven by a three phase ac induction motor.

Cooling water pump A was started five minutes ago to initiate flow in the cooling water system. Cooling water pump B is about to be started in parallel alignment with pump A.

When pump B is started, which one of the following would cause the ammeter for pump B to remain off-scale high for several seconds longer than usual before returning to normal running current indication?

- A. The pump packing was removed and not reinstalled.
- B. The pump was initially rotating in the reverse direction.
- C. Two phases of the motor windings were electrically switched.
- D. The coupling between the motor and the pump was removed and not reinstalled.

ANSWER: B.

TOPIC: 291005  
KNOWLEDGE: K1.04 [2.7/2.7]  
QID: B27

Given the following conditions for a variable-speed motor-driven centrifugal pump:

Flow rate = 2000 gpm  
Motor current = 100 amperes

If the flow rate is increased to 4000 gpm, which one of the following motor current values most closely approximates the actual value?

- A. 200 amperes
- B. 400 amperes
- C. 800 amperes
- D. 1600 amperes

ANSWER: C.



TOPIC: 291005  
KNOWLEDGE: K1.04 [2.7/2.7]  
QID: B227 (P223)

A centrifugal pump is operating with a flow rate of 3,000 gpm and a current requirement of 200 amps. If the pump speed is reduced such that the flow rate is 2,000 gpm, what is the final current requirement at the new lower speed? (Assume a constant motor voltage.)

- A. 59 amperes
- B. 89 amperes
- C. 133 amperes
- D. 150 amperes

ANSWER: A.

TOPIC: 291005  
KNOWLEDGE: K1.04 [2.7/2.7]  
QID: B326 (P328)

A centrifugal pump is operating with the following parameters:

Speed	=	1,800 rpm
Current	=	40 amperes
Pump head	=	20 psi
Pump flow rate	=	400 gpm

Which one of the following will be the new value of pump head and current if the speed is increased to 2,000 rpm?

- A. 22 psi, 44 amps
- B. 25 psi, 49 amps
- C. 22 psi, 49 amps
- D. 25 psi, 55 amps

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.04 [2.7/2.7]  
QID: B1228

A centrifugal pump is operating at 600 rpm with the following parameters:

Current = 100 amperes  
Pump head = 50 psid  
Pump flow rate = 880 gpm

What will be the approximate value of pump head if pump speed is increased such that the pump now draws 640 amperes?

- A. 93 psid
- B. 126 psid
- C. 173 psid
- D. 320 psid

ANSWER: C.

TOPIC: 291005  
KNOWLEDGE: K1.04 [2.7/2.7]  
QID: B1626 (P3129)

A multi-speed motor-driven centrifugal pump is operating with the following parameters:

Motor current = 27 amps  
Pump head = 50 psi  
Pump flow rate = 880 gpm

Which one of the following will be the approximate new value of pump head if pump speed is increased such that the motor current is now 64 amperes?

- A. 89 psi
- B. 119 psi
- C. 211 psi
- D. 281 psi

ANSWER: A.

TOPIC: 291005  
KNOWLEDGE: K1.04 [2.7/2.7]  
QID: B2030 (P428)

A variable-speed centrifugal pump is operating at 600 rpm with the following parameters:

Pump motor current = 10 amperes  
Pump head = 50 psi  
Pump flow rate = 200 gpm

What will be the new value of pump head if the pump speed is increased such that the current requirements are now 640 amperes?

- A. 400 psi
- B. 600 psi
- C. 800 psi
- D. 1,200 psi

ANSWER: C.

TOPIC: 291005  
KNOWLEDGE: K1.04 [2.7/2.7]  
QID: B2126 (P1530)

A variable-speed centrifugal pump is operating with the following parameters:

Speed	= 1,200 rpm
Current	= 40 amperes
Pump head	= 20 psi
Pump flow rate	= 400 gpm

Which one of the following contains the approximate values of pump head and current if pump speed is increased to 1,600 rpm?

- A. 25 psi, 55 amps
- B. 25 psi, 95 amps
- C. 36 psi, 55 amps
- D. 36 psi, 95 amps

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.04 [2.7/2.7]  
QID: B2229 (P2130)

A centrifugal pump is operating at 600 rpm with the following parameters:

Motor current = 100 amperes  
Pump head = 50 psid  
Pump flow rate = 880 gpm

Which one of the following will be the approximate value of pump head if pump speed is increased to 1200 rpm?

- A. 71 psid
- B. 100 psid
- C. 141 psid
- D. 200 psid

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.04 [2.7/2.7]  
QID: B2527 (P2529)

A multispeed centrifugal pump is operating with a flow rate of 1800 gpm at a speed of 3600 rpm. Which one of the following approximates the new flow rate if the pump speed is decreased to 2400 rpm?

- A. 900 gpm
- B. 1050 gpm
- C. 1200 gpm
- D. 1350 gpm

ANSWER: C.

TOPIC: 291005  
KNOWLEDGE: K1.04 [2.7/2.7]  
QID: B2627 (P1828)

An ac motor-driven centrifugal pump is operating with a flow rate of 3,000 gpm and a motor current of 150 amps. If the pump speed is reduced such that the flow rate is 2,000 gpm, what is the approximate final motor current at the new lower speed? (Assume a constant motor voltage.)

- A. 44 amperes
- B. 59 amperes
- C. 67 amperes
- D. 100 amperes

ANSWER: A.

TOPIC: 291005  
KNOWLEDGE: K1.04 [2.7/2.7]  
QID: B3127 (P3130)

Which one of the following describes the relationship between the current supplied to an ac induction motor and the amount of heat generated (kW) in the motor windings?

- A. Heat generation is directly proportional to the current.
- B. Heat generation is proportional to the cube of the current.
- C. Heat generation is proportional to the square of the current.
- D. Heat generation is proportional to the square root of the current.

ANSWER: C.

TOPIC: 291005  
KNOWLEDGE: K1.05 [2.6/2.7]  
QID: B28 (P2229)

Which one of the following describes the motor current indications that would be observed during the start of a large ac motor-driven centrifugal pump with a closed discharge valve?

- A. Current immediately increases to the full-load value and gradually decreases to the no-load value over several minutes.
- B. Current rapidly increases to the no-load value over several seconds and stabilizes.
- C. Current immediately increases to many times the no-load value and then rapidly decreases to the no-load value after several seconds.
- D. Current immediately increases to many times the no-load value and then gradually decreases to the no-load value after several minutes.

ANSWER: C.



TOPIC: 291005  
KNOWLEDGE: K1.05 [2.6/2.7]  
QID: B105 (P108)

The average starting current for a typical ac motor is approximately...

- A. ten to fifteen times its normal running current.
- B. five to seven times its normal running current.
- C. two to three times its normal running current.
- D. the same as its normal running current.

ANSWER: B.

TOPIC: 291005  
KNOWLEDGE: K1.05 [2.6/2.7]  
QID: B1227

Which one of the following ac motor events is characterized by maximum rotor slip and a motor current five to six times full-load current?

- A. Starting of the motor
- B. Ground in motor windings
- C. Motor overloaded by 50%
- D. Motor operating at breakdown torque

ANSWER: A.

TOPIC: 291005  
KNOWLEDGE: K1.05 [2.6/2.7]  
QID: B1327 (P1827)

Which one of the following describes the motor current during the start of a typical ac motor-driven centrifugal pump with a closed discharge valve?

- A. Current immediately increases to the full-load value and then gradually decreases to the no-load value.
- B. Current immediately increases to the full-load value and then stabilizes at the full-load value.
- C. Current immediately increases to many times the full-load value and then rapidly decreases to the no-load value after several seconds and then stabilizes.
- D. Current immediately increases to many times the full-load value and then rapidly decreases to the full-load value after several seconds and then stabilizes.

ANSWER: C.

TOPIC: 291005  
KNOWLEDGE: K1.05 [2.6/2.7]  
QID: B1428 (P1929)

Which one of the following describes the typical ammeter response during a normal start of a large ac motor-driven centrifugal pump with a closed discharge valve?

- A. Indication will go off scale high and then return to the no-load value.
- B. Indication will go off scale high and then return to the full-load value.
- C. Indication will approach full scale and then return to the no-load value.
- D. Indication will approach full scale and then return to the full-load value.

ANSWER: A.

TOPIC: 291005  
KNOWLEDGE: K1.05 [2.6/2.7]  
QID: B2127 (P29)

The starting current in a typical ac induction motor is much higher than the full-load running current because...

- A. starting torque is much lower than running torque.
- B. starting torque is much higher than running torque.
- C. rotor current during start is too low to generate significant counter electromotive force (CEMF) in the stator.
- D. rotor speed during start is too low to generate significant CEMF in the stator.

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.05 [2.6/2.7]  
QID: B2227 (P2230)

Two identical 4160 Vac induction motors are connected to identical centrifugal pumps being used to provide cooling water flow in separate systems in a power plant. Each motor is rated at 1000 hp. The discharge valve for pump A is fully open and the discharge valve for pump B is fully shut.

If each motor is then started, the longest time period required to stabilize motor current will be experienced by motor \_\_\_\_\_ and the higher stable motor current will be experienced by motor \_\_\_\_\_.

- A. A; A
- B. A; B
- C. B; A
- D. B; B

ANSWER: A.

TOPIC: 291005  
KNOWLEDGE: K1.05 [2.6/2.7]  
QID: B2428 (P2430)

Which one of the following describes when the highest stator current will be experienced by an ac induction motor?

- A. During motor operation at full load
- B. During motor operation at zero load
- C. Immediately after energizing the motor
- D. Immediately after deenergizing the motor

ANSWER: C.

TOPIC: 291005  
KNOWLEDGE: K1.05 [2.6/2.7]  
QID: B2528 (P2531)

Frequent starts of large motors will result in overheating of the motor windings due to high current flow caused by...

- A. low electrical resistance of the motor windings.
- B. an electrical short circuit between the rotor and stator.
- C. high counter electromotive force at low rotor speeds.
- D. windage losses between the rotor and stator.

ANSWER: A.

TOPIC: 291005  
KNOWLEDGE: K1.05 [2.6/2.7]  
QID: B2727 (P2730)

Two identical 4160 Vac induction motors are connected to identical centrifugal pumps in identical but separate cooling water systems. Each motor is rated at 200 hp. The discharge valve for pump A is fully shut and the discharge valve for pump B is fully open.

If each motor is then started, the longest time period required to stabilize motor current will be experienced by motor \_\_\_\_\_ and the higher stable motor current will be experienced by motor \_\_\_\_\_.

- A. A; A
- B. A; B
- C. B; A
- D. B; B

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.05 [2.6/2.7]  
QID: B2828 (P2830)

Two identical 4160 Vac induction motors are connected to identical centrifugal pumps being used to provide cooling water flow in separate identical systems in a power plant. Each motor is rated at 1000 hp. The discharge valve for pump A is fully shut and the discharge valve for pump B is fully open.

If each motor is then started, the longer time period required to stabilize motor current will be experienced by motor \_\_\_\_\_ and the higher stable motor current will be experienced by motor \_\_\_\_\_.

- A. A; A
- B. A; B
- C. B; A
- D. B; B

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.05 [2.6/2.7]  
QID: B2928 (P930)

Which one of the following causes starting current to be greater than running current for a typical ac induction motor?

- A. The rotor does not develop maximum induced current flow until it has achieved synchronous speed.
- B. After the motor starts, resistors are added to the electrical circuit to limit the running current.
- C. A large amount of starting current is required to initially establish the rotating magnetic field.
- D. The rotor field induces an opposing voltage in the stator that is proportional to rotor speed.

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.05 [2.6/2.7]  
QID: B3529 (P2931)

Two identical 4160 Vac induction motors are connected to identical centrifugal pumps in identical but separate cooling water systems. Each motor is rated at 200 hp. The discharge valve for pump A is fully shut and the discharge valve for pump B is fully open.

When the motors are started under these conditions, the shorter time period required to reach a stable running current will be experienced by motor \_\_\_\_\_, and the higher stable running current will be experienced by motor \_\_\_\_\_.

- A. A; A
- B. A; B
- C. B; A
- D. B; B

ANSWER: B.

TOPIC: 291005  
KNOWLEDGE: K1.06 [2.9/3.1]  
QID: B26

For large electric motors, why must the number of starts over a period of time be limited?

- A. Protect the power supply cables from insulation breakdown due to high starting current
- B. Protect the motor windings from overheating
- C. Prevent motor thrust-bearing damage due to lack of lubrication
- D. Prevent rotor seizure due to thermal expansion of the windings

ANSWER: B.

TOPIC: 291005  
KNOWLEDGE: K1.06 [2.9/3.1]  
QID: B228 (P2631)

Which one of the following is the reason for limiting the number of motor starts in a given time period?

- A. Minimizes pitting of contacts in the motor breaker
- B. Prevents excessive torsional stresses on motor shaft
- C. Prevents overheating of motor windings
- D. Minimizes axial stresses on motor bearings

ANSWER: C.

TOPIC: 291005  
KNOWLEDGE: K1.06 [2.9/3.1]  
QID: B328 (P231)

The frequency of large ac motor starts should be limited to prevent excessive...

- A. torsional stresses on the motor shaft.
- B. wear of pump thrust bearings.
- C. arcing and degradation of motor breaker contacts.
- D. heat buildup within the motor.

ANSWER: D.



TOPIC: 291005  
KNOWLEDGE: K1.06 [2.9/3.1]  
QID: B928

Motor winding temperature will be reduced by...

- A. increasing the reactive current flow in the stator windings.
- B. limiting the number of motor starts allowed in a given time period.
- C. decreasing the voltage supplied to the motor during full-load operation.
- D. decreasing the number of stator poles during the start sequence.

ANSWER: B.

TOPIC: 291005  
KNOWLEDGE: K1.06 [2.9/3.1]  
QID: B1128 (P1131)

The frequency of start/stop cycles for an electrical motor is limited to prevent...

- A. overheating the motor windings.
- B. excessive shaft torsional stresses.
- C. overheating the motor supply bus.
- D. excessive cycling of the motor breaker.

ANSWER: A.

TOPIC: 291005  
KNOWLEDGE: K1.06 [2.9/3.1]  
QID: B1826 (P30)

What is the primary reason for limiting the number of starts for an electric motor in a given period of time?

- A. Prevent overheating of the windings due to high starting currents.
- B. Prevent overheating of the windings due to shorting within the stator.
- C. Prevent rotor damage due to excessive cyclic stresses on the shaft.
- D. Prevent rotor damage due to excessive axial displacement of the shaft.

ANSWER: A.

TOPIC: 291005  
KNOWLEDGE: K1.06 [2.9/3.1]  
QID: B1928 (P1031)

The number of starts for an electric motor in a given period of time should be limited because overheating of the \_\_\_\_\_ can occur due to the \_\_\_\_\_ counter electromotive force produced at low rotor speeds.

- A. windings; high
- B. windings; low
- C. commutator and/or slip rings; high
- D. commutator and/or slip rings; low

ANSWER: B.

TOPIC: 291005  
KNOWLEDGE: K1.06 [2.9/3.1]  
QID: B3327 (P3331)

A large centrifugal pump is driven by a 200 horsepower 4.16 kV ac motor. The motor breaker control circuit contains the following protection devices: instantaneous overcurrent relay, motor thermal overload relay, control power fuses, and an anti-pumping device.

The pump had been manually started and stopped several times during a 5-minute period when the motor breaker unexpectedly tripped. In this situation, which one of the following is the most likely cause of the breaker trip?

- A. Instantaneous overcurrent
- B. Motor thermal overload
- C. Blown control power fuse
- D. Anti-pumping device actuation

ANSWER: B.

TOPIC: 291005  
KNOWLEDGE: K1.07 [2.6/2.6]  
QID: B528

What unit of measurement is used to describe the rate of electron flow?

- A. Volt-amp reactive (VAR)
- B. Ohm
- C. Volt
- D. Ampere

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.07 [2.6/2.6]  
QID: B628

A difference in electrical potential is measured in...

- A. amps.
- B. volts.
- C. ohms.
- D. volt-amps reactive.

ANSWER: B.

TOPIC: 291005  
KNOWLEDGE: K1.07 [2.6/2.6]  
QID: B828

The force that causes electrons to flow in an electrical circuit is called...

- A. power.
- B. current.
- C. voltage.
- D. resistance.

ANSWER: C.

TOPIC: 291005  
KNOWLEDGE: K1.07 [2.6/2.6]  
QID: B929

What is the significance of a power factor of 0.8 when describing the output of a generator?

- A. The relationship between generator output voltage and current can be described as purely resistive.
- B. 80% of the energy input to the generator produces useful output.
- C. 80% of the generator output will be converted to useful power.
- D. This information characterizes the generator as a dc generator.

ANSWER: C.

TOPIC: 291005  
KNOWLEDGE: K1.07 [2.6/2.6]  
QID: B1129

The term "volt" describes...

- A. a rate of electron flow.
- B. the resistance to current flow.
- C. an electrical potential difference.
- D. the transfer of circulating currents.

ANSWER: C.

TOPIC: 291005  
KNOWLEDGE: K1.07  
QID: B3328

A 120 VDC battery is rated at 800 amp-hours for a continuous 50 kW load. Approximately how long will the fully charged battery be able to supply a continuous 50 kW load before the battery rating is exceeded?

- A. 115 minutes
- B. 90 minutes
- C. 75 minutes
- D. 60 minutes

ANSWER: A.

TOPIC: 291005  
KNOWLEDGE: K1.08 [2.5/2.6]  
QID: B29

Which one of the following describes the effects on generator excitation and power factor with the generator connected to an infinite power grid?

- A. Increasing field current increases excitation and shifts power factor from lagging toward leading.
- B. Increasing field current increases excitation and shifts power factor from leading toward lagging.
- C. Decreasing field current increases excitation and shifts power factor from leading toward lagging.
- D. Decreasing field current increases excitation and shifts power factor from leading toward lagging.

ANSWER: B.

TOPIC: 291005  
KNOWLEDGE: K1.08 [2.5/2.6]  
QID: B120 (P115)

A main generator that is connected to an infinite power grid has the following indications:

100 MWe  
0 MVAR  
2,900 amps  
20,000 Vac

If main generator excitation is reduced, amps will \_\_\_\_\_ and MWe will \_\_\_\_\_.

- A. decrease; decrease
- B. increase; decrease
- C. decrease; remain the same
- D. increase; remain the same

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.08 [2.5/2.6]  
QID: B226 (P1928)

A main generator is connected to an infinite power grid. Which one of the following conditions will exist if the generator is operating underexcited?

- A. Negative MVARs (VARs in) and a leading power factor
- B. Positive MVARs (VARs out) and a leading power factor
- C. Positive MVARs (VARs out) and a lagging power factor
- D. Negative MVARs (VARs in) and a lagging power factor

ANSWER: A.

TOPIC: 291005  
KNOWLEDGE: K1.08 [2.5/2.6]  
QID: B428

A main generator is connected to an infinite power grid with VARs out (positive VARs). Increasing main generator excitation will cause main generator current to \_\_\_\_\_ and main generator VARs to \_\_\_\_\_.

- A. increase; decrease
- B. increase; increase
- C. decrease; decrease
- D. decrease; increase

ANSWER: B.

TOPIC: 291005  
KNOWLEDGE: K1.08 [2.5/2.6]  
QID: B529

A main generator that is connected to an infinite power grid has the following indications:

100 MWe  
100 MVAR (VARs out)  
2,800 amps

If main generator excitation is reduced slightly, amps will \_\_\_\_\_ and MWe will \_\_\_\_\_.

- A. decrease; decrease
- B. increase; decrease
- C. decrease; remain the same
- D. increase; remain the same

ANSWER: C.



TOPIC: 291005  
KNOWLEDGE: K1.08 [2.5/2.6]  
QID: B729

A main generator that is connected to an infinite power grid has the following indications:

100 MWe  
100 MVAR (VARs out)  
2,800 amps

If main generator excitation is increased slightly, amps will \_\_\_\_\_ and MWe will \_\_\_\_\_.

- A. decrease; increase
- B. increase; increase
- C. decrease; remain the same
- D. increase; remain the same

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.08 [2.5/2.6]  
QID: B1030

A main generator is operating in parallel with an infinite power grid with generator VARs currently at zero. If generator field excitation increases, generator VARs will become \_\_\_\_\_ and generator power factor will become \_\_\_\_\_.

- A. positive (VARs out); leading
- B. negative (VARs in); leading
- C. positive (VARs out); lagging
- D. negative (VARs in); lagging

ANSWER: C.

TOPIC: 291005  
KNOWLEDGE: K1.08 [2.5/2.6]  
QID: B1229

A main generator is operating in parallel with an infinite power grid and is supplying 0 MVAR. If generator field current is increased, the generator will become \_\_\_\_\_ and will attain a \_\_\_\_\_ power factor.

- A. overexcited; leading
- B. underexcited; lagging
- C. underexcited; leading
- D. overexcited; lagging

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.08 [2.5/2.6]  
QID: B1532 (P2628)

A main generator that is connected to an infinite power grid has the following indications:

100 MWe  
0 MVAR  
2,900 amps  
20,000 volts

If main generator excitation is increased, amps will \_\_\_\_\_ and MWe will \_\_\_\_\_.

- A. remain the same; increase
- B. remain the same; remain the same
- C. increase; increase
- D. increase; remain the same

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.08 [2.5/2.6]  
QID: B1729 (P1728)

A main generator that is connected to an infinite power grid has the following indications:

600 MWe  
100 MVAR (VARs in)  
13,800 amps  
25,000 volts

If main generator excitation is decreased slightly, amps will \_\_\_\_\_ and MVAR will \_\_\_\_\_.

- A. decrease; increase
- B. increase; increase
- C. decrease; decrease
- D. increase; decrease

ANSWER: B.

TOPIC: 291005  
KNOWLEDGE: K1.08 [2.5/2.6]  
QID: B1830 (P1428)

A main generator that is connected to an infinite power grid has the following indications:

600 MWe  
100 MVAR (VARs in)  
13,800 amps  
25,000 volts

If main generator excitation is increased slightly, amps will \_\_\_\_\_ and MWe will \_\_\_\_\_.

- A. decrease; increase
- B. increase; increase
- C. decrease; remain the same
- D. increase; remain the same

ANSWER: C.

TOPIC: 291005  
KNOWLEDGE: K1.08 [2.5/2.6]  
QID: B2028 (P2027)

A diesel generator (D/G) is supplying both kW and kVAR to an electrical bus that is connected to an infinite power grid. Assuming D/G and bus voltage do not change, if the D/G voltage regulator setpoint is increased slightly, then D/G kW will \_\_\_\_\_ and D/G amps will \_\_\_\_\_.

- A. remain the same; increase
- B. remain the same; remain the same
- C. increase; increase
- D. increase; remain the same

ANSWER: A.

TOPIC: 291005  
KNOWLEDGE: K1.08 [2.5/2.6]  
QID: B2128 (P928)

A main generator is operating in parallel with an infinite power grid. If the voltage supplied to the generator field is slowly and continuously decreased, the generator will experience high current due to: (Assume no generator protective actuations occur.)

- A. excessive generator MWe.
- B. excessive generator KVAR (VARs out).
- C. excessive generator KVAR (VARs in).
- D. generator reverse power.

ANSWER: C.

TOPIC: 291005  
KNOWLEDGE: K1.08 [2.5/2.6]  
QID: B2330 (P2328)

A main generator that is connected to an infinite power grid has the following indications:

600 MWe  
100 MVAR (VARs out)  
13,800 amps  
25,000 volts

If main generator excitation is decreased, amps will initially \_\_\_\_\_ and MVAR will initially \_\_\_\_\_.

- A. decrease; increase
- B. increase; increase
- C. decrease; decrease
- D. increase; decrease

ANSWER: C.

TOPIC: 291005  
KNOWLEDGE: K1.08 [3.4/3.5]  
QID: B2444 (P2439)

Two identical 1000 MW ac electrical generators are operating in parallel supplying all the loads on a common electrical bus. The generator output breakers also provide identical protection for the generators. Generator A and B output indications are as follows:

<u>Generator A</u>	<u>Generator B</u>
28,000 KV	28,000 KV
60 Hertz	60 Hertz
150 MW	100 MW
25 MVAR (out)	50 MVAR (out)

A malfunction causes the voltage regulator set point for generator B to slowly and continuously decrease. If no operator action is taken, the current indication for generator B will...

- A. initially decrease, and then increase until the output breaker for generator A trips on overcurrent.
- B. initially decrease, and then increase until the output breaker for generator B trips on overcurrent.
- C. decrease continuously until the output breaker for generator A trips on overcurrent.
- D. decrease continuously until the output breaker for generator B trips on reverse power.

ANSWER: A.

TOPIC: 291005  
KNOWLEDGE: K1.08 [2.5/2.6]  
QID: B2530 (P2528)

A diesel generator (D/G) is supplying both KW and KVAR to an electrical bus that is connected to an infinite power grid. Assuming bus voltage does not change, if the D/G voltage regulator set point is decreased slightly, then D/G KW will \_\_\_\_\_ and D/G amps will \_\_\_\_\_.

- A. remain the same; decrease
- B. remain the same; remain the same
- C. decrease; decrease
- D. decrease; remain the same

ANSWER: A.

TOPIC: 291005  
KNOWLEDGE: K1.08 [3.4/3.5]  
QID: B2543 (P2540)

Two identical 1000 MW electrical generators are operating in parallel supplying the same isolated electrical bus. The generator output breakers also provide identical protection for the generators. Generator A and B output indications are as follows:

<u>Generator A</u>	<u>Generator B</u>
22 KV	22 KV
60.2 Hertz	60.2 Hertz
200 MW	200 MW
25 MVAR (out)	50 MVAR (out)

A malfunction causes the voltage regulator setpoint for generator A to slowly increase continuously toward a maximum of 25 KV. If no operator action is taken, generator B output current will...

- A. initially decrease, and then increase until the output breaker for generator A trips on overcurrent.
- B. initially decrease, and then increase until the output breaker for generator B trips on overcurrent.
- C. increase continuously until the output breaker for generator A trips on overcurrent.
- D. increase continuously until the output breaker for generator B trips on overcurrent.

ANSWER: A.



TOPIC: 291005  
KNOWLEDGE: K1.08 [2.5/2.6]  
QID: B2729 (P2728)

A main generator is operating in parallel with an infinite power grid. If the voltage supplied to the generator field is slowly and continuously increased, the generator will experience high current due to: (Assume no generator protective actuations occur.)

- A. generator reverse power.
- B. excessive generator MWe.
- C. excessive generator KVAR (VARs in).
- D. excessive generator KVAR (VARs out).

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.08 [3.4/3.5]  
QID: B3344 (P2041)

Two identical 1000 Mw electrical generators are operating in parallel, supplying the same isolated electrical bus. The generator output breakers also provide identical protection for the generators. Generator A and B output indications are as follows:

<u>Generator A</u>	<u>Generator B</u>
22.5 Kv	22.5 Kv
60.2 Hertz	60.2 Hertz
750 Mw	750 Mw
25 MVAR (VARs out)	50 MVAR (VARs out)

A malfunction causes the voltage regulator for generator B to slowly and continuously increase the terminal voltage for generator B. If no operator action is taken, which one of the following describes the electrical current indications for generator A?

- A. Current will decrease continuously until the output breaker for generator A trips on reverse power .
- B. Current will decrease continuously until the output breaker for generator B trips on reverse power .
- C. Current will initially decrease, and then increase until the output breaker for generator A trips on overcurrent.
- D. Current will initially decrease, and then increase until the output breaker for generator B trips on overcurrent.

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.08 [3.4/3.5]  
QID: B3543 (P2838)

Two identical 1000 MW electrical generators are operating in parallel supplying the same isolated electrical bus. The generator output breakers provide identical protection for the generators. Generator A and B output indications are as follows:

<u>Generator A</u>	<u>Generator B</u>
22 KV	22 KV
60.2 Hertz	60.2 Hertz
800 MW	800 MW
50 MVAR (out)	25 MVAR (in)

A malfunction causes the voltage regulator for generator B to slowly and continuously increase the terminal voltage for generator B. If no operator action is taken, generator B output current will...

- A. increase continuously until the output breaker for generator A trips on overcurrent.
- B. increase continuously until the output breaker for generator B trips on overcurrent.
- C. initially decrease, and then increase until the output breaker for generator A trips on overcurrent.
- D. initially decrease, and then increase until the output breaker for generator B trips on overcurrent.

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.08 [2.5/2.6]  
QID: B3629 (P3629)

A main turbine-generator is operating in parallel with an infinite power grid. If the turbine control valves (or throttle valves) slowly fail open, the generator will experience high current primarily due to... (Assume no generator protective actuations occur.)

- A. excessive generator MWe.
- B. excessive generator KVAR (VARs out).
- C. excessive generator KVAR (VARs in).
- D. generator reverse power.

ANSWER: A.

TOPIC: 291005  
KNOWLEDGE: K1.09 [2.3/2.6]  
QID: B329

A 24,000 Vac generator is operating at 800 MWe, 20,700 amperes, and a negative 325 MVAR (VARs in). What is the power factor?

- A. 0.93 leading
- B. 0.93 lagging
- C. 0.81 leading
- D. 0.81 lagging

ANSWER: A.

TOPIC: 291005  
KNOWLEDGE: K1.09 [2.3/2.6]  
QID: B630

A 4160 Vac diesel generator (D/G) is loaded to 2850 kW with a 0.85 power factor. What is the approximate kVAR load on the D/G?

- A. 503 kVAR
- B. 1766 kVAR
- C. 2850 kVAR
- D. 3353 kVAR

ANSWER: B.

TOPIC: 291005  
KNOWLEDGE: K1.09 [2.3/2.6]  
QID: B930

A 125 Vdc motor is rated at 10 kW. What is the current rating of the motor?

- A. 4.6 amps
- B. 8.0 amps
- C. 46.2 amps
- D. 80.0 amps

ANSWER: D.

TOPIC: 291005  
KNOWLEDGE: K1.09 [2.3/2.6]  
QID: B1529 (P2228)

A diesel generator (D/G) is supplying an electrical bus that is connected to an infinite power grid. Assuming D/G terminal voltage and bus frequency do not change, if the D/G governor setpoint is increased from 60 Hz to 60.1 Hz, then D/G kVAR will be \_\_\_\_\_ and D/G amps will be \_\_\_\_\_.

- A. the same; higher
- B. the same; the same
- C. higher; higher
- D. higher; the same

ANSWER: A.

TOPIC: 291005  
KNOWLEDGE: K1.09 [2.3/2.6]  
QID: B2029 (P1128)

If the voltage supplied by an ac generator to an isolated electrical bus is held constant while loads (kW) are added to the bus, the current supplied by the generator will increase in direct proportion to the \_\_\_\_\_ of the change in kW. (Assume power factor does not change.)

- A. cube root
- B. square root
- C. amount
- D. square

ANSWER: C.


TOPIC: 291005  
KNOWLEDGE: K1.09 [2.3/2.6]  
QID: B2929 (N/A)

Refer to the drawing of an electrical system power triangle (see figure below).

Which one of the following represents the power factor for this system?

- A. A divided by B
- B. A divided by C
- C. B divided by A
- D. B divided by C

ANSWER: D.

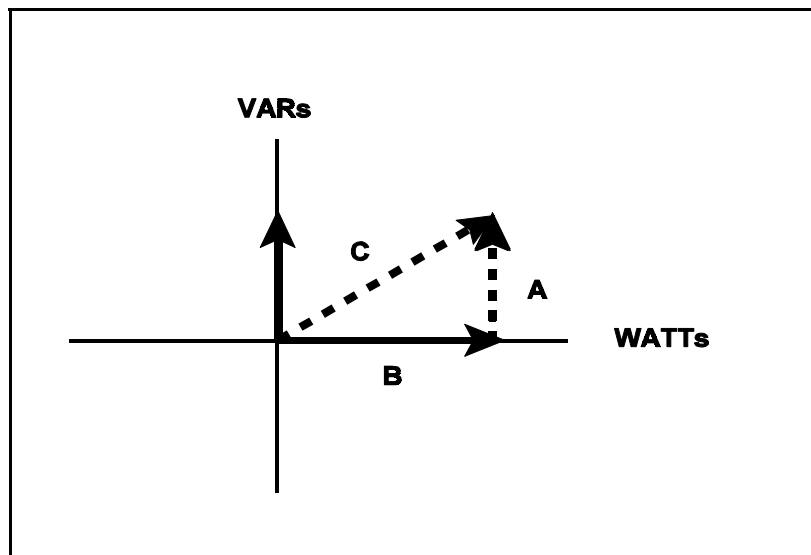

TOPIC: 291005  
KNOWLEDGE: K1.09 [3.4/3.5]  
QID: B3130 (P3142)

A plant is operating at 80% power in the middle of a fuel cycle. The main generator is connected to an infinite power grid with the following initial main generator output parameters:

Frequency: 60 Hz  
Voltage: 25 KV  
Reactive Load: 300 MVAR (out)  
Real Load: 800 MW

A hydraulic oil system malfunction causes the main turbine steam inlet valves to begin to slowly drift closed. Over the next 10 minutes, the main generator real load decreases to 300 MW. Assuming no operator actions are taken during the load decrease, how will the following main generator output parameters be affected?

<u>Frequency</u>	<u>Voltage</u>	<u>Reactive Load</u>
A. Decrease	Decrease	No change
B. Decrease	No change	Decrease
C. No change	No change	No change
D. No change	Decrease	Decrease

ANSWER: C.



TOPIC: 291005  
KNOWLEDGE: K1.09 [2.3/2.6]  
QID: B4015

Refer to the drawing of an electrical system power curve (see figure below).

If the system is operating at point A, which one of the following is the power factor for this system?

- A. 0.80
- B. 0.88
- C. 0.93
- D. 0.97

ANSWER: D.

